

AD-A044 947

ROME AIR DEVELOPMENT CENTER GRIFFISS AFB N Y  
A STATISTICS COLLECTION PACKAGE FOR THE JOVIAL J3 PROGRAMMING L--ETC(U)

F/G 9/2


UNCLASSIFIED

SEP 77 R E STOVER  
RADC-TR-77-293

NL

1 OF 1  
AD  
A044 947



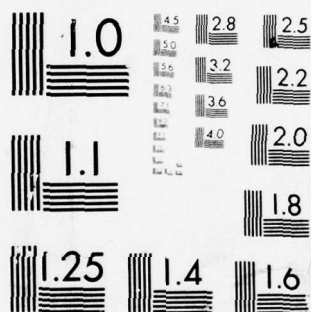

MICROCOPY RESOLUTION TEST CHART  
NATIONAL BUREAU OF STANDARDS-1963-A

AD A 044947

RADC-TR-77-293  
In-house Report  
September 1977

12  
P.S.




A STATISTICS COLLECTION PACKAGE FOR THE JOVIAL J3 PROGRAMMING LANGUAGE

Robert E. Stover, Jr.

Approved for public release; distribution unlimited.

AD No. \_\_\_\_\_  
DDC FILE COPY


ROME AIR DEVELOPMENT CENTER  
Air Force Systems Command  
Griffiss Air Force Base, New York 13441

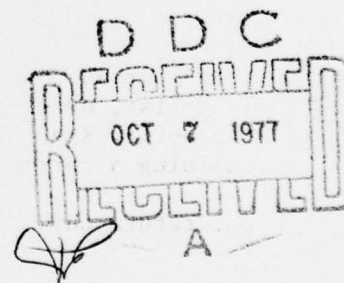

This report has been reviewed by the Office of Information, RADC, and is releasable to the National Technical Information Service (NTIS). At NTIS it will be releasable to the general public, including foreign nations.


This report has been reviewed and is approved for publication.

APPROVED:

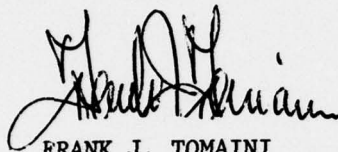


FRANK J. TOMAINI  
Chief, Information Processing Branch  
Information Sciences Division

APPROVED:



ROBERT D. KRUTZ, Col, USAF  
Chief, Information Sciences Division

FOR THE COMMANDER:



JOHN P. HUSS  
Acting Chief, Plans Office

If your address has changed or if you wish to be removed from the RADC mailing list, or if the addressee is no longer employed by your organization, please notify RADC (DAP) Griffiss AFB NY 13441. This will assist us in maintaining a current mailing list.

Do not return this copy. Retain or destroy.

⑦ Rept. for Jul 74 - Dec 76

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER RADC-TR-77-293 ✓	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) A STATISTICS COLLECTION PACKAGE FOR THE JOVIAL J3 PROGRAMMING LANGUAGE		5. TYPE OF REPORT & PERIOD COVERED In-house Jul 74 - Dec 76
7. AUTHOR(s) Robert E./Stover, Jr.		6. PERFORMING ORG. REPORT NUMBER N/A
9. PERFORMING ORGANIZATION NAME AND ADDRESS Rome Air Development Center (ISIS) Griffiss AFB NY 13441		8. CONTRACT OR GRANT NUMBER(s) N/A
11. CONTROLLING OFFICE NAME AND ADDRESS Same		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS 62702F 55810002
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) Same		12. REPORT DATE September 1977
		13. NUMBER OF PAGES 40
		15. SECURITY CLASS. (of this report) Unclassified
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE N/A
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report) Same		
18. SUPPLEMENTARY NOTES None		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) High Order Language Usage Computer Programming Software Statistics Hash Coding Symbol Table JOVIAL Programming Errors		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) This report describes a software package developed in-house by RADC to measure counts, averages, and percentages relative to the usage of constructs and features of the JOVIAL J3 high order language by programmers. The numbers of occurrences of certain language features are obtained by processing the input JOVIAL J3 sources program in a manner similar to that employed by the front end of a compiler. This data is then used to calculate other quantities, averages, and percentages. Hash coding of identifiers in the input program and (Over)		

DD FORM 1 JAN 73 1473 EDITION OF 1 NOV 65 IS OBSOLETE

UNCLASSIFIED  
SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

309050

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

20.

any associated compools, and a symbol table in which information about these identifiers is recorded are used to assist in the statistics collection process.

This statistics collector is expected to be a valuable tool in the development of JOVIAL J3 and other programming languages by providing guidance relative to (1) more effective methods of programming, (2) implementation of compilers with greater efficiency, and (3) possible language changes.

This report also includes a summary of the syntax, semantics, and computer system interface errors made by the implementor in the process of development of the software package. The visibility provided by this information is expected to increase understanding of the nature, causes, and methods of avoidance of software errors.

ACCESSION NO.	
DTIC	White Service <input checked="" type="checkbox"/>
INFO	Buff Service <input type="checkbox"/>
UNCLASSIFIED	<input type="checkbox"/>
JUSTIFICATION	
BY	
DISTRIBUTION/AVAILABILITY CODES	
NO.	AVAIL. AND/OR SPECIAL
A	

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

## A STATISTICS COLLECTION PACKAGE FOR THE JOVIAL J3 PROGRAMMING LANGUAGE

Robert E. Stover, Jr.

### 1.0 INTRODUCTION

The JOVIAL J3 Statistics Collector, produced under an in-house effort by the Rome Air Development Center, is a software package designed to measure usage of the various constructs and features of the JOVIAL J3 higher-order computer programming language. The statistics collector takes as input a JOVIAL J3 source program, and operates upon this code to obtain various statistical quantities about the program. It is hoped that the statistical information derived by this package will enable more effective programming in the JOVIAL J3 language, greater efficiency in implementation of JOVIAL J3 compilers, and suggestions regarding possible language changes. Since JOVIAL J3 has been the official Air Force language for command and control applications, it is an ideal language for such analysis.

This statistics collector is currently hosted and running on the HIS 600/6000 GCOS computer system at RADC, but has been designed to be as system independent as possible. It processes JOVIAL J3 as described by MIL-STD-1588 (USAF), 30 June 1976, with certain features added for compatibility with the JOVIAL Compiler Implementation Tool (JOCIT).

A summary of basic facts about the JOVIAL J3 Statistics Collector appears in Table 1.

### 2.0 HISTORY

A brief summary of key events in the development of the JOVIAL J3 Statistics Collector is presented here. Since the productivity of the programmer and implementor, expressed in lines of code generated as a function of man-hours of work, is of interest, this information is presented in Graph 1.

#### 2.1 Early Work

Construction of the JOVIAL J3 Statistics Collector began in July 1974, after a need for statistical information about the language became evident within the Air Force. The first task undertaken involved the

execution of a hash coding(\*) routine with a given list of names as input; no processing of an actual program was performed.

In November 1974, a design for the statistics collector consisting of a compool, main program, routine to return tokens of the language, and output routine was put onto the system. At first the token returning routine was merely a prearranged list of tokens, but soon an actual operational scanner was implemented. These four modules correspond to the present STCOMP, STATCO, GETTOK, and PUTOUT.

## 2.2 Process of Major Development

Once its basic structure had been established, the statistics collector was progressively beefed up. At first the package only yielded information on numbers of types of statements and perhaps one or two other miscellaneous items, but in December 1974, a subroutine to process assignment statements and count various operators and operands contained therein was implemented. In January 1975, hash coding of identifiers was restored as part of the package, using the independently compiled subroutine TOKHSH.

Work on the statistics collector was then suspended for six months. One of the first tasks conducted upon resumption of the effort was the detection and counting of various types of declarations. Also, the recompilation of the entire statistics collector every time a change was made to any part of it was found to be wasteful and expensive, so a procedure was established for saving the object code of modules on permfiles on the GCOS computer system and only recompiling modules affected by changes prior to a run. Since changes to a compool generally require recompilation of any referencing programs, it was decided to move the statistical data, only referenced by STATCO and PUTOUT, into a new compool COMPST, requiring recompilation of only this compool and these two executable modules whenever the statistical data base was revised.

In October 1975, a symbol table containing information about identifiers was incorporated into the statistics collector, and this capability has

(\*) Hash coding is a method by which a name is assigned to a unique location in a table having  $n$  entries by determining the value modulo  $n$  of some integer function of the name, such as the sum of the machine representations of the words containing it. If the entry determined for a given name is already occupied by another name (this is called a collision), a quadratic function is applied with successive integers, and this amount added to the original location, to determine a new table entry until a vacant position for the name can be found in the table. When this name is again referenced by the program, this procedure can be repeated to find where it was originally stored, precluding the necessity of searching through most of the table for the name.

been progressively upgraded to the present. The hash coding output routine, previously called HSHOUT, was renamed TABOUT, and now printed both the hash coding and symbol tables.

The inclusion of a symbol table prompted the revision of the statistics collector to a two-pass structure. This was done for a while by making GETTOK the entire first pass, fetching all of the tokens upon one call from STATCO and creating the symbol table, while STATCO performed the second pass statistical processing. This was found to be inefficient, so a new subroutine module, PASS1, was called once from STATCO, and called GETTOK, which had been reverted to yielding one token per call, whenever the next token in the input stream was needed. At this point, all eight independently compiled modules of the present statistics collector structure were in place (see Section 3.0).

From this point until major testing of the package was begun in June 1976, most of the work consisted of refinement of the statistics collector and increasing the types of statistical quantities obtained. Two major extensions which deserve mention are the implementation of compool resolution of identifiers and the processing of define directives and substitutions.

### 2.3 Recent Testing and Debugging

During most of the process of its development, the statistics collector was run with its own modules as input. However, during June, July, and December 1976, the JOVIAL J3 Compiler Validation System (JCVS-J3) and certain software produced by Strategic Air Command (SAC) headquarters were used as input to the package. Previously undetected errors uncovered by this process included failure to handle unnamed tables; wrong detection of control transfer and switch names in some instances; and incorrect symbol table type assignments from item descriptions. The utility of the SAC software was limited by lack of access to the compools referenced by those programs.

## 3.0 DESCRIPTION OF MODULES

The JOVIAL J3 Statistics Collector currently consists of eight independently compiled modules: two compools, one driver program, and five procedures performing various functions within the package. Reference has already been made in Sections 2.1 and 2.2 to the historical development of each of these modules. They are individually described below, and their logical interrelationship appears in Table 2. Table 3 lists the size of each module, and summarizes its function.

### 3.1 STCOMP

STCOMP is the main compool of the statistics collector. It contains declarations of simple items, tables, arrays, files, and procedures used

during execution, as well as a few declarations of statistical items calculated by the scanner GETTOK. It is referenced by all executable modules.

### 3.2 COMPST

COMPST is the compool containing declarations of most statistical quantities. It is only referenced by STATCO, where these values are calculated, and PUTOUT, where they are output.

### 3.3 STATCO

STATCO is the driver program of the package. It calls PASS1 to perform the first pass, then does the statistical counting and calculation of the second pass itself. After this is completed, it calls output routines PUTOUT and TABOUT. It contains closes to collect statistics about arithmetic expressions, named tables, unnamed tables, and arrays, and subroutines to determine type of assignment and to collect statistics about item description types.

### 3.4 PASS1

PASS1 conducts the first pass of statistics collection, which consists primarily of symbol table creation. It calls GETTOK to obtain the next input token when needed, employing token lookahead in some instances. It also calls TOKHSH to hash code identifiers. PASS1 contains a close for assigning symbol table name, scope, and class to identifiers, and subroutines to discern between unsigned and signed integer and fixed items and to create symbol table entries for like tables.

### 3.5 GETTOK

GETTOK is the scanner. It performs essentially as a finite state machine, scanning the stream of input characters until a token of the language is detected. In the case of a define name reference, the scan can be diverted to the appropriate define string. GETTOK contains subroutines for assigning a numerical value to each character and for detecting and handling the end of an input line or define string.

A list of the tokens of the JOVIAL J3 language, all of which are now detected by GETTOK, appears in Table 4.

### 3.6 TOKHSH

TOKHSH, the hash coding routine, uses a quadratic hash coding algorithm which places each distinct compool and source program identifier at a unique position in the hash table, and sets up a symbol table reference for the identifier. It contains subroutines to determine whether identifiers of identical spelling are in fact the same or different with regard to scope and context, and to determine how an identifier is declared.

### 3.7 PUTOUT

PUTOUT is called by STATCO, and prints a summary of the statistical information collected and evaluated by the package.

### 3.8 TABOUT

TABOUT, also called by STATCO, prints the hash coding and symbol tables for the input program, including any associated compools.

## 4.0 DOCUMENTATION

Written information about the JOVIAL J3 Statistics Collector and its construction and implementation has been maintained in various forms for a number of aspects of the effort. These are listed below, and their structure is portrayed in Table 5. The number of pages in each document appears in Table 6.

### 4.1 Descriptions and Reports

A considerable amount of general information about the statistics collector has been provided at various times during the course of the project. A brief summary of such documents is presented here.

Early in the effort, a brief review of the nature and purpose of the statistics collector was set forth in "JOVIAL J3 Statistics Collector," dated 10 September 1974. This was accompanied by "Statistics Collector Components," an outline of statistics expected to be gathered by the package, bearing the same date. This report and outline both reside on the HIS 600/6000 Multics computer system at RADC.

An early, and now somewhat out of date, design plan for the statistics collector appears in "Overall Design of the JOVIAL J3 Statistics Collector." The date of this paper is uncertain, but is probably around October 1974. A handwritten copy of this report exists in the statistics collector records, but it has never been put onto a computer system.

Two interim reports of progress in the development of the statistics collector have been produced. The first, "Status of the JOVIAL J3 Statistics Collector," dated 13 January 1975, resides on the GCOS computer system at RADC, and has been distributed to some extent. This report summarizes early work on the package, discusses its structure in some detail, and provides an analysis of errors made up to that point. This material was updated in "Second Interim Report on the JOVIAL J3 Statistics Collector," dated 26 March 1976, which resides on the Multics computer system at RADC, but has never been formally published.

An RADC Status Report, Form 77b, dated 1 October 1976, describes the state of the statistics collector effort as of that date in handwritten

tabular form, and is in the statistics collector records.

It is expected that a brief report will be produced at the end of the entire statistics collector project, updating this RADC Technical Report and summarizing the final work on the effort.

#### 4.2 List of Highlights

This is a chronological listing of the major milestones and extensions of capability for the statistics collector from its inception to the present.

#### 4.3 Daily Diary

This is a day-by-day account of work performed on the statistics collector, and other related events, from 23 September 1974 to the present. Monthly summaries describe work accomplished prior to the inception of daily accounting.

#### 4.4 Time and Cost Information

Hours spent working on the statistics collector, number of terminal sessions, total terminal connect time, terminal cost, number of batch runs, total processor time for batch runs, batch cost, and total computer cost are recorded for each date on which work was performed on the statistics collector from 15 October 1974 to the present. Table 7 contains a summary of this information on a monthly basis.

#### 4.5 Error Data

This is a record of all programmer errors made on the package since 1 October 1974, and all compiler and system errors occurring since its inception. Prior to 30 September 1975, accounts of errors were written up in paragraph form; since 1 October 1975, they have been recorded in tabular form. Programmer errors have been subdivided into six categories: forgetfulness, logic, data management, subroutine linkage, input/output, and resource allocation. Aspects of errors considered include criticality, relationship to attempted correction of previous errors, and number of runs required to fix. A summary of the error information obtained so far in the project appears in Table 8.

Reclassification of these errors based on the categories established by TRW Systems Group in a recent study of software reliability (1) has been accomplished. The results of this reclassification appear in Table 9. Further discussion of error analysis appears in Section 6.

#### 4.6 Computer Output

Listings of terminal sessions and batch runs have been saved since quite early in the effort. These listings are not complete, but cover most of the significant work done on the statistics collector.

## 5.0 RESULTS ACHIEVED TO DATE

As is indicated in Table 10, the statistics collector now possesses an extensive capability for describing usage of JOVIAL J3 constructs and features by programmers. Counts and percentages of both declaration and executable statement types are provided. A further breakdown of tokens in arithmetic expressions is derived. Information such as number of lines in the program, average line length, average comment length, etc., is also calculated.

No real analysis of the statistical data obtained by running various programs through the statistics collector has yet been conducted. In fact, some of the programs used as input are not truly representative of JOVIAL J3 software, so the applicability of such an analysis might be limited. However, it has been noticed that the use of structured programming technology has been somewhat lacking (data not explicitly declared, IF statements used in preference to IFEITH, many GOTO statements, etc.) Another observation is that certain programmers tend to completely avoid using particular features of the language, such as arrays or exchange statements.

An example of an actual output listing from execution of the statistics collector, including hash coding and symbol tables, appears in Table 11. The first pass and symbol table routine PASS1 of the statistics collector itself, with reference to main statistics collector compool STCOMP, was used as source program input in this case.

## 6.0 ANALYSIS OF ERRORS

As mentioned in Section 4.5, the source and compiler errors made in the process of coding the statistics collector have been categorized both in terms of the implementor's own classification scheme, and that devised by TRW Systems Group (2). The reason for going to such great lengths to analyze these errors is that it was felt that this effort provided a ready-made opportunity to observe the commission, discovery, and correction of errors during the actual software development process. It is hoped that investigation of this data and its comparison with that from other software projects will provide meaningful insight into the problem of software errors.

As indicated previously, Tables 8 and 9 summarize this data. A further analysis of each of the two error classifications follows in Sections 6.1 and 6.2.

Another important aspect of source errors is the relationship between the total number of errors and the lines of code produced. Graph 2 expresses this relationship.

### 6.1 Implementor's Classification

As stated in Section 4.5, this classification consists of six categories of user errors, plus a separate category for compiler or system errors. The most prevalent categories of user errors are seen to be logic and data management. This reflects the extensive logical branching required to identify language constructs from the source code and tokens, and the extensive manipulation required to operate upon data entities, particularly in relation to the symbol table. Subroutine linkage errors are fewer in number, but are more often critical (causing all or most of the statistics collector to fail to operate properly), as would be expected. Resource allocation errors are almost always critical, for the package cannot really run without the provision of required space or time. Nearly 20% of all user errors are related to attempts to correct previous errors; this is considered a high figure.

## 6.2 TRW Classification

As is seen in Table 9, the errors are divided among 20 categories (3), 4 of which are considered non-applicable to this effort for the reasons stated. As with the previous classification, logic and data handling are the most prevalent error categories, and errors related to the global operation of the software tend to be more critical. The "Recurrent" category is a catch-all for all errors resulting from another attempted error correction, and these errors are not further classified, except with regard to criticality. Compiler or system errors are generally included in the "Operating System/System Support Software" category.

The total number of errors included in this second classification is slightly greater than that in the first because some errors were made between the times of the two classifications, and also because some single errors in the first classification were considered multiple errors for purposes of the second.

## 7.0 FUTURE PLANS

The statistics collector is now pretty well completed, with most of the desired capability having been incorporated into the package. There are a few features yet to be added. These include collection of further information about IF, IFEITH, and FOR statements, and the levels of nesting of such statements; increased analysis of the right side of assignment statements; treatment of arithmetic expressions in contexts besides assignment; and recording of frequency of usage of implementation procedures and functions.

It is also planned to modify the statistics collector to record information about a large number of programs in a data base maintained by the host system. Currently, information can only be obtained about one program at a time, and is lost after output. By replacing the process of outputting information about a single program with that of using this information to update a continuously existing data base, a

statistical summary of as many programs as desired can be maintained.

#### 8.0 CONCLUSION

As has already been indicated, the JOVIAL J3 Statistics Collector has been in the process of development for some time, and is now approaching completion. The value of this tool to the Air Force and others cannot be fully appraised until it is run against a significant number of representative yet diverse JOVIAL J3 programs. However, the specific results derived from the limited inputs applied to the package to date give promise of its increased utility in the future. The task of its construction has been a valuable learning experience for the implementor, both in regard to the JOVIAL J3 language and to software design and development procedures. As pointed out in Sections 4.5 and 6.0, the software error information collected throughout most of this effort is expected to significantly increase understanding in this area.

In short, the JOVIAL J3 Statistics Collector has already enhanced a number of aspects of software understanding within the Air Force, and will do so in even greater measure in the future. It will prove to be a highly useful tool in assisting the Air Force in various phases of JOVIAL J3 and software development.

#### REFERENCES

(1) TRW Systems Group, Software Reliability Study, Technical Report, RADC-TR-76-238, Redondo Beach, CA, August 1976, p. 3-1 to 3-22.

(2) Ibid.

(3) Ibid., p. 3-3 to 3-8.

Start date: July 1974

Periods during which work conducted:

July 1974 through January 1975

July 1975 through July 1976

December 1976 through January 1977

Total time expenditure: 7 man/months

Total cost of computer (HIS 600/6000 GCOS) usage since 15 Oct 74:  
\$7366.82

Number of independently compiled modules: 8

Lines of source code as of 21 Dec 76: 4023

User coding and implementation errors, 1 Oct 74 - 21 Dec 76: 285

Pages of written documentation as of 21 Dec 76: 307

Approximate percentage of code employing top-down design: 90%

Approximate percentage of code employing structured programming: 95%

Percentage of code written in JOVIAL J3: 100%

Table 1: Facts about JOVIAL J3 Statistics Collector

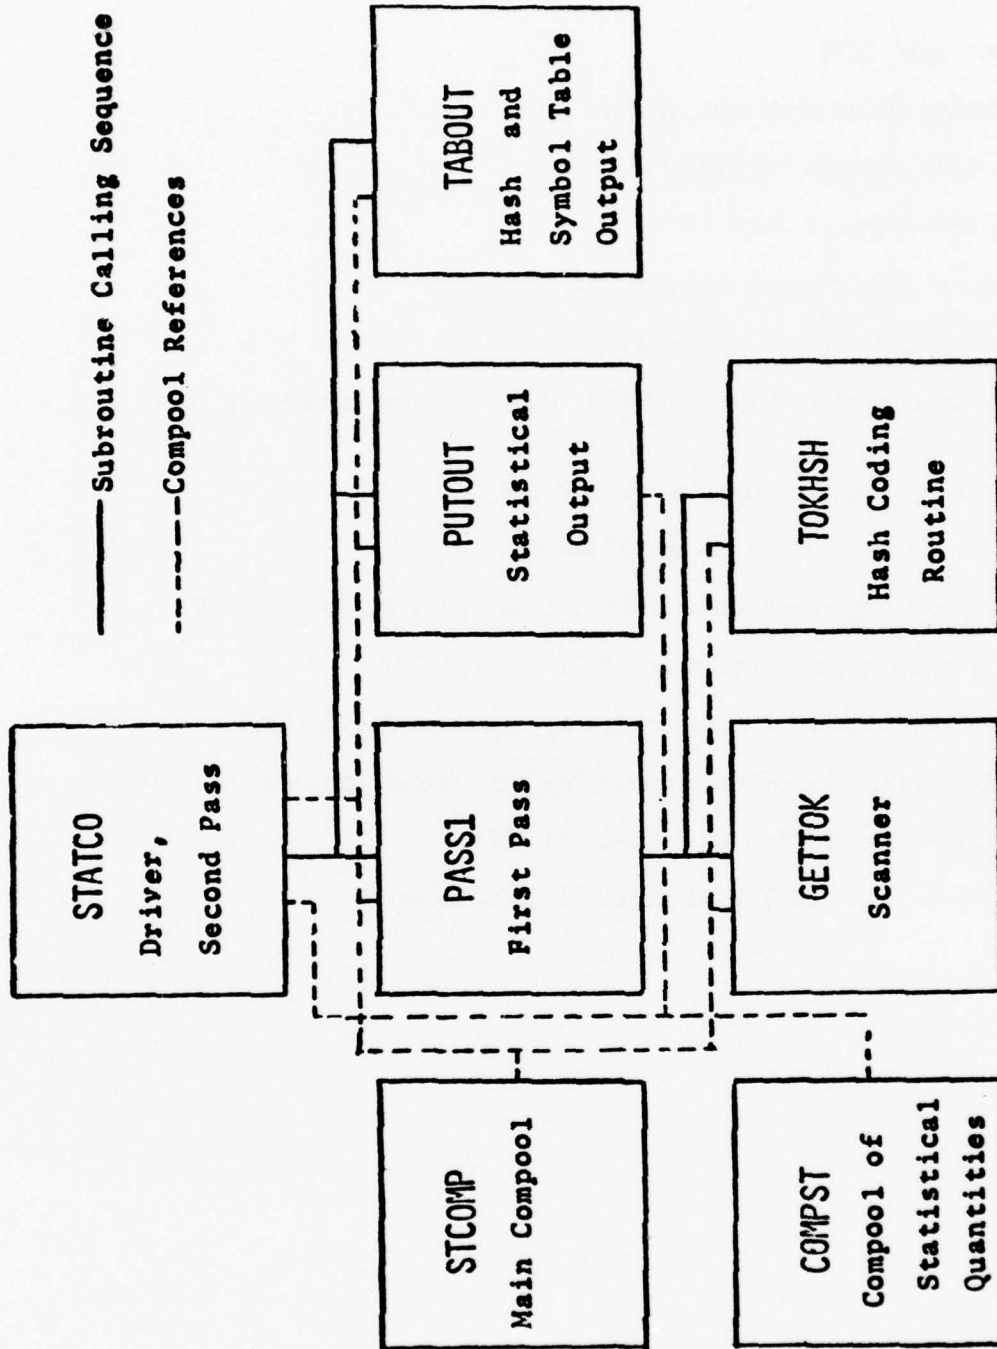


Table 2. Interconnection of Statistics Collector Modules

Module	Function	Size in Lines
STCOMP	Main compool	226
COMPST	Compool containing statistical data	213
STATCO	Driver program	810
PASS1	First pass, symbol table creation	931
GETTOK	Scanner, token detector	754
TOKHSH	Hash coding	287
PUTOUT	Statistical output	577
TABOUT	Hash coding and symbol table output	<u>225</u>
Total number of lines		4023
Average number of lines per module		503

Table 3: Size and Function of Statistics Collector Modules

I. Tokens identifying type of statement or clause

IF	FOR	RETURN
IFEITH	GOTO	TEST
ORIF	STOP	ASSIGN

II. Tokens identifying type of declaration

ITEM	CLOSE
STRING	PROGRAM or 'PROGRAM (independently compiled close)
TABLE	ARRAY
FILE	COMMON
PROC	MODE
OVERLAY	SWITCH
DEFINE	MONITOR

III. Single letter tokens indicating declaration attributes

A (fixed item, or integer if precision not specified)

B (boolean item or binary file)

C (ASCII item)

D (dense table packing)

F (floating item)

H (hollerith item or file)

I (integer item)

L (like table)

M (medium table packing)

N (no table packing)

P (item preset or parallel table structure)

R (rounding, rigid table size, or fixed length file)

S (signed or status item, or serial table structure)

T (transmission code item)

U (unsigned item)

V (variable table size, or variable length file)

#### IV. Statement or character string delimiters

\$ (statement or declaration terminator)

BEGIN, END (compound statement, grouped declaration, or constant list delimiters)

START, TERM (independent compilation delimiters)

DIRECT, JOVIAL (direct code delimiters)

() (parentheses)

(\$ \$) (subscript or BIT or BYTE parameter delimiters)

, (comma)

... (range limit separator in item descriptions)

. (period, statement name terminator)

#### V. Arithmetic, relational, or logical operators

##### A. Arithmetic and assignment operators

=	*
== (exchange)	/
+	** (exponentiation)
-	(* *) (exponentiation brackets)

##### B. Relational operators

EQ (equal)	LQ (less than or equal)
NQ (not equal)	GR (greater than)
LS (less than)	GQ (greater than or equal)

##### C. Logical operators

AND  
OR  
NOT

#### VI. Variables and constants

Identifier  
FOR parameter  
Integer constant

Hollerith constant  
Transmission code constant  
ASCII constant

Fixed constant  
Floating constant  
Octal constant

Status constant  
Accumulator specification

#### VII. Built-in functions

BIT	ENT or ENTRY
BYTE	LOC or 'LOC
CHAR	NENT
MANT	NWDSEN
ABS	ODD
(/ /) (absolute value brackets)	POS
ALL	

#### VIII. Input/output primitives

OPEN	INPUT
SHUT	OUTPUT

Table 4: Tokens of the JOVIAL J3 Language

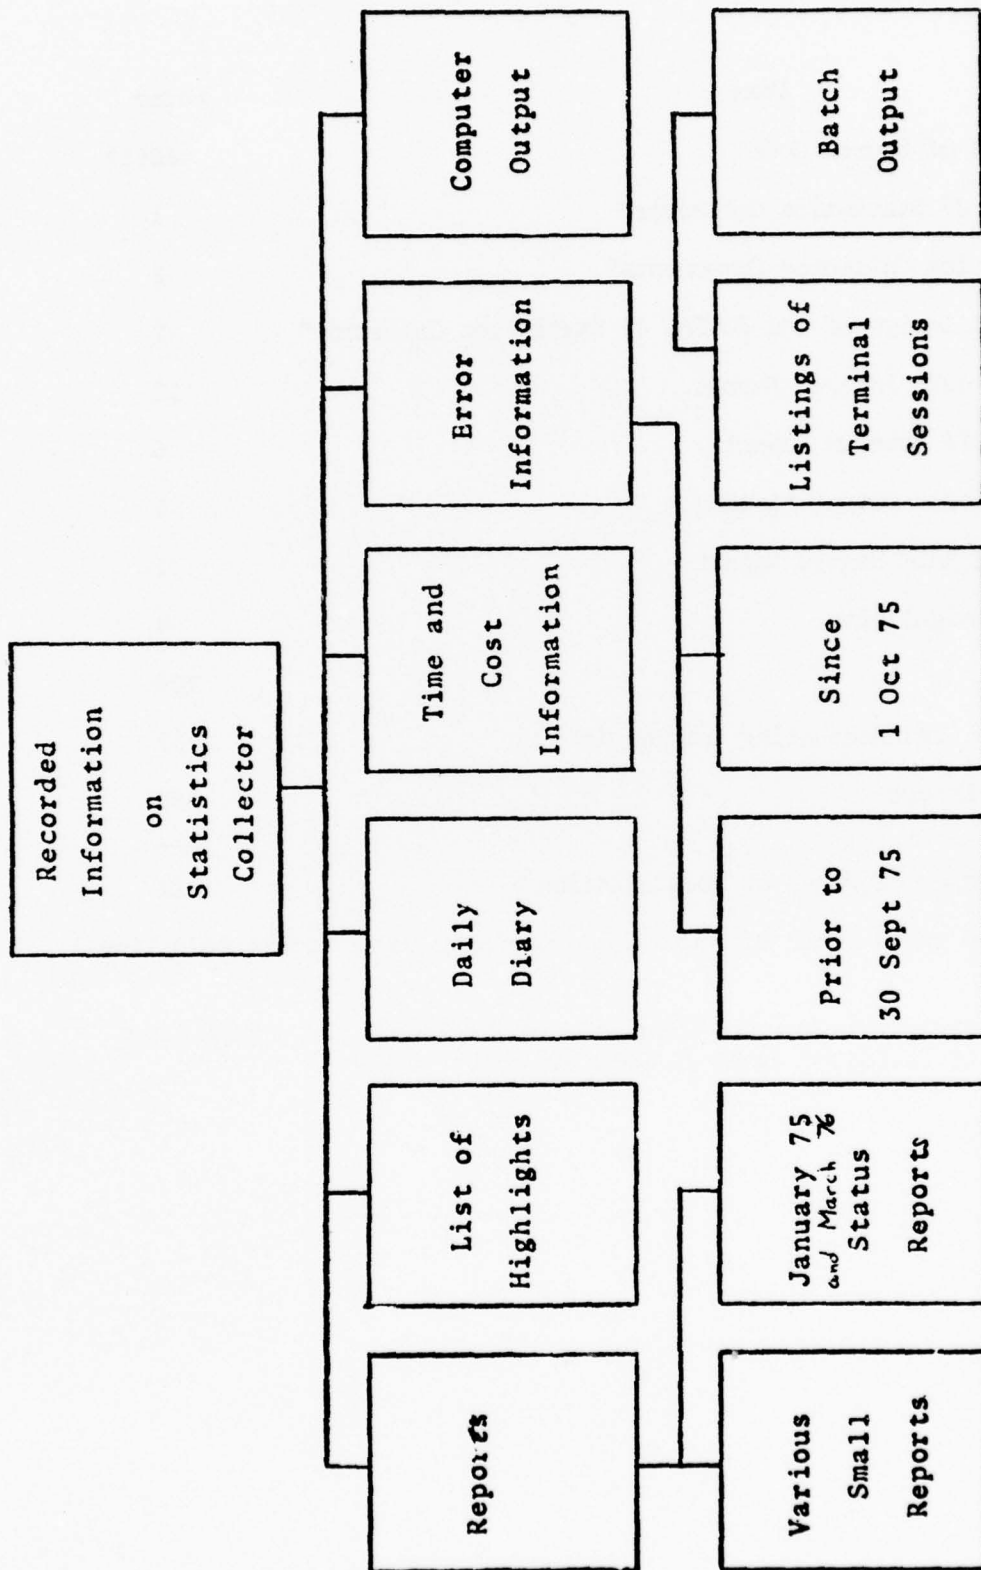


Table 2. Structure of Documentation about Statistics Collector

Item	Pages
Listings of Source Code	80(1)
"JOVIAL J3 Statistics Collector"	1
"Statistics Collector Components"	2
"Overall Design of the JOVIAL J3 Statistics Collector"	2
January 1975 Interim Report	13
March 1976 Interim Report	6
Early Sample Output Listing	1
Standard RADC Status Report	2
List of Highlights	4
Diary	108
Time and Cost Accounting Information	12
List of Errors	80
	<hr/>
Total Number of Pages of Documentation	311
(1) Based on 50 lines of source code per page (code totals 4023 lines).	

Table 6: Available Written Documentation Regarding the JOVIAL J3 Statistics Collector as of 21 December 1976

Month	Hours Spent	Terminal Usage Sessions	Time(1)	Cost	#	Batch Runs Time(2)	Cost	Total Cost
October(3)	46	8	.812	\$6.52	8	.1113	\$60.68	\$67.20
November	86	30	9.464	63.31	26	.1585	167.70	231.01
December	44	21	6.465	45.27	17	.2792	212.27	257.54
1974 Totals(4)	176	59	16.741	\$115.10	51	.5490	\$440.65	\$555.75
January	51	13	4.633	\$50.21	8	.3740	\$293.49	\$343.70
February	0	0	.000	.00	0	.0000	.00	.00
March	0	0	.000	.00	0	.0000	.00	.00
April	0	0	.000	.00	0	.0000	.00	.00
May	0	0	.000	.00	0	.0000	.00	.00
June	0	0	.000	.00	0	.0000	.00	.00
July	28	9	3.689	26.45	14	.1554	96.94	123.39
August	63	37	9.172	69.70	32	.5506	370.75	440.45
September	81	63	12.880	99.88	49	.6800	445.21	545.09
October	76	22	8.728	65.38	19	.5982	224.05	289.43
November	48	15	3.579	30.45	11	.4132	144.06	174.51
December	102	46	17.298	136.91	41	3.2360	933.64	1070.55
1975 Totals	449	205	59.979	\$478.98	174	6.0074	\$2508.14	\$2987.12
January	80	23	11.400	\$85.57	20	.9993	\$290.54	\$376.11
February	63	30	10.497	82.28	29	.4693	556.65	638.93
March	73	22	5.876	49.05	21	.3107	432.19	481.24
April	44	25	9.657	73.92	21	.3221	280.10	354.02
May	61	20	9.402	68.34	17	.2279	232.09	300.43
June	125	109	29.610	239.14	77	1.2700	940.82	1179.96
July	9	4	1.725	12.36	8	.0576	46.75	59.11
August	0	0	.000	.00	0	.0000	.00	.00
September	0	0	.000	.00	0	.0000	.00	.00
October	0	0	.000	.00	0	.0000	.00	.00
November	0	0	.000	.00	0	.0000	.00	.00
December	73	38	10.968	101.65	33	.4146	332.50	434.15
1976 Totals	528	271	89.135	\$712.31	226	4.0715	\$3111.64	\$3823.95
Grand Totals	1153	535	165.855	\$1306.39	451	10.6279	\$6060.43	\$7366.82

(1) Clock time.

(2) Central Processing Unit (CPU) time.

(3) From 15 October 1974 through end of month.

(4) From 15 October 1974 through end of year.

Table 7: Statistics Collector Time and Cost Expenditures,  
15 October 1974 - 31 December 1976

### User Errors

Category	Total # of Errors	Critical Errors(1) #	%	Secondary Errors(2) #	%	% of all User Errors
Forgetfulness	49	28	57.14	6	12.24	17.19
Logic	119	22	18.49	22	18.49	41.75
Data Management	80	35	43.75	16	20.00	28.07
Subroutine Linkage	19	13	68.42	7	36.84	6.67
Input/ Output	10	1	10.00	1	10.00	3.51
Resource Allocation	8	8	10.00	0	0.00	2.81
Totals	285	107	37.54	52	18.25	100.00

### Compiler or System Errors(3)

Critical	13
Non-critical	<u>4</u>
Total	17

(1)Errors causing most or all of the statistics collector to fail to operate properly.

(2)Errors caused by attempted correction of another error.

(3)Collection of data begun at inception of project in July, 1974.

Table 8: Statistics Collector Errors from 1 October 1974 through 21 December 1976, Using Implementor's Own Classification

Error Category	Description of Category	Number of Errors			% of Critical Errors	% of Total # of Errors
		Critical	Non-Critical	Total		
1	Computational	5	22	27	18.52	7.92
2	Logic	29	78	107	27.10	31.38
3	Input/Output	5	10	15	33.33	4.40
4	Data Handling	26	34	60	43.33	17.60
5	Operating System/ System Support Software	13	4	17	76.47	4.99
6	Configuration	0	0	0	0.00	0.00
7	Routine/ Routine Interface	8	7	15	53.33	4.40
8	Routine/ System Software Interface	2	3	5	40.00	1.47
9	Tape Processing Interface	Not applicable because magnetic tapes not directly used with software				
10	User Interface	2	0	2	100.00	0.59
11	Data Base Interface	0	0	0	0.00	0.00
12	User Requested Changes	Not applicable because not yet any other users				
13	Preset Data Base	10	2	12	83.33	3.52
14	Global Variable/ Compool Definition	7	2	9	77.78	2.64
15	Recurrent	26	38	64	40.62	18.77
16	Documentation	Not applicable because such errors not recorded				
17	Requirements Compliance	8	0	8	100.00	2.35
18	Operator	0	0	0	0.00	0.00
19	Questions	Not applicable because not yet any other users				
20	Unidentified	0	0	0	0.00	0.00
Totals		141	200	341	41.35	100.00

Table 9: Statistics Collector Errors from 1 October 1974 through 31 December 1976, Using TRW Systems Group Classification

#### I. General information about program

- A. Number of lines
- B. Number of tokens with and without define expansion
- C. Number of characters, and average per line
- D. Number of comments, and average length
- E. Number of define directives, and average length
- F. Number of define calls, and average per define directive

#### II. Number and percentage of various types of declarations

- A. Simple item
- B. Array, including breakdown by number and size of dimensions
- C. Table, including breakdown by table attributes
- D. Overlay
- E. File
- F. Switch
- G. Close
- H. Program
- I. Common
- J. Monitor
- K. Procedure and function
- L. Breakdown of all item descriptions by type
- M. Number of mode directives

#### III. Summary of external references

- A. Breakdown of compool resolved names
- B. External closes referenced
- C. System defined procedures and functions
- D. Mode defined simple items
- E. Simple items resolved to default attributes
- F. Percentage of identifiers declared implicitly

#### IV. Number and percentage of various types of statements

- A. Assignment, including breakdown by type of assignment
- B. Exchange
- C. GOTO
- D. Return
- E. Stop
- F. Test
- G. Procedure call
- H. Input/output, including breakdown by exact nature
- I. IF

J. IFEITH  
K. FOR  
L. Direct

V. Summary information about statements

- A. Total number of simple and complex executable statements
- B. Total number of executable and non-executable statements
- C. Number of compound statements
- D. Number of statement labels

VI. Information about arithmetic expressions

- A. Total number
- B. Total number of tokens
- C. Number of constants
- D. Number of variables
- E. Number of subscripted variables
- F. Counts of occurrences of various operators
- G. Counts of references to built-in and other functions

Table 10: Statistical Information about Source Program Currently Available

# STATISTICAL SUMMARY OF JOVIAL J3 LANGUAGE USAGE

NUMBER OF LINES IN INPUT SOURCE PROGRAM = 931  
 NUMBER OF TOKENS IN INPUT PROGRAM EXCLUDING DEFINE STRING EXPANSION = 4143  
 NUMBER OF TOKENS IN INPUT PROGRAM INCLUDING FULL DEFINE STRING EXPANSION = 4143  
 NUMBER OF CHARACTERS IN INPUT SOURCE PROGRAM INCLUDING LEADING BLANKS AND COMMENTS = 42095  
 AVERAGE NUMBER OF CHARACTERS PER LINE IN INPUT PROGRAM INCLUDING LEADING BLANKS AND COMMENTS = 45.21  
 NUMBER OF COMMENTS IN INPUT PROGRAM = 556  
 AVERAGE LENGTH IN CHARACTERS OF COMMENTS IN INPUT PROGRAM = 32.51  
 NUMBER OF DEFINE DIRECTIVES IN INPUT SOURCE PROGRAM = 0  
 AVERAGE LENGTH IN CHARACTERS OF INPUT DEFINE DIRECTIVES = 0.  
 NUMBER OF DEFINE CALLS IN INPUT SOURCE PROGRAM = 0  
 AVERAGE NUMBER OF DEFINE CALLS PER DEFINE DIRECTIVE = 0.

NUMBER OF DECLARATIONS = 42  
 NUMBER OF SIMPLE ITEM DECLARATIONS = 38  
 PERCENTAGE OF ALL DECLARATIONS = 90.48 %  
 NUMBER OF ARRAY DECLARATIONS = 0  
 PERCENTAGE OF ALL DECLARATIONS = 0. %  
 AVERAGE NUMBER OF DIMENSIONS PER ARRAY = 0.  
 DISTRIBUTION OF NUMBERS OF ARRAY DIMENSIONS:  
 1 DIMENSION - 0 5 DIMENSIONS - 0  
 2 DIMENSIONS - 0 6 DIMENSIONS - 0  
 3 DIMENSIONS - 0 7 DIMENSIONS - 0  
 4 DIMENSIONS - 0  
 AVERAGE OF ALL ARRAY DIMENSION SIZES = 0.  
 NUMBER OF TABLE DECLARATIONS = 0  
 PERCENTAGE OF ALL DECLARATIONS = 0. %  
 TOTAL NUMBER OF TABLE ITEM AND STRING ITEM DECLARATIONS IN ALL TABLES = 0  
 0 TABLE ITEMS, 0 STRING ITEMS  
 AVERAGE NUMBER OF ITEMS PER TABLE = 0.  
 AVERAGE NUMBER OF ENTRIES PER TABLE = 0.  
 AVERAGE NUMBER OF WORDS PER SPECIFIED TABLE ENTRY = 0.  
 DISTRIBUTION OF TABLE SIZES BY NUMBER OF ENTRIES:  
 10 OR FEWER ENTRIES 0 1,001 TO 10,000 ENTRIES 0  
 11 TO 100 ENTRIES 0 MORE THAN 10,000 ENTRIES 0  
 101 TO 1,000 ENTRIES 0

TYPE OF ENTRY: 0 ORDINARY, 0 SPECIFIED  
 NATURE OF NUMBER OF ENTRIES: 0 RIGID, 0 VARIABLE  
 STRUCTURE: 0 PARALLEL, 0 SERIAL  
 PACKING: 0 N/0, 0 MEDIUM, 0 DENSE  
 NUMBER OF LIKE TABLES = 0  
 NUMBER OF UNNAMED TABLES = 0  
 TOTAL NUMBER OF DECLARATIONS HAVING EXPLICIT OR IMPLICIT ITEM DESCRIPTION = 39  
 INTEGER 14  
 UNSIGNED 0  
 SIGNED 14  
 FIXED POINT 0  
 UNSIGNED 0  
 SIGNED 0  
 NUMBER OF OVERLAY DECLARATIONS = 0  
 PERCENTAGE OF ALL DECLARATIONS = 0. %  
 NUMBER OF FILE DECLARATIONS = 0  
 PERCENTAGE OF ALL DECLARATIONS = 0. %  
 FLOATING POINT 0  
 BOOLEAN 13  
 HOLLERITH 9  
 TRANSMISSION CODE 0  
 ASCII 0  
 STATUS 3

NUMBER OF SWITCH DECLARATIONS = 0  
 PERCENTAGE OF ALL DECLARATIONS = 0. %  
 NUMBER OF PROGRAM DECLARATIONS = 0  
 PERCENTAGE OF ALL DECLARATIONS = 0. %  
 NUMBER OF CLOSE DECLARATIONS = 1  
 PERCENTAGE OF ALL DECLARATIONS = 2.38 %  
 NUMBER OF PROCEDURE AND FUNCTION DECLARATIONS = 3  
 PERCENTAGE OF ALL DECLARATIONS = 7.14 %  
 2 PROCEDURE DECLARATIONS, 1 FUNCTION DECLARATIONS  
 NUMBER OF COMMON DECLARATIONS = 0  
 PERCENTAGE OF ALL DECLARATIONS = 0. %  
 NUMBER OF MONITOR DECLARATIONS = 0  
 PERCENTAGE OF ALL DECLARATIONS = 0. %  
 NUMBER OF MODE DIRECTIVES = 0  
 NUMBER OF DEFINE DIRECTIVES = 0

NUMBER OF NAMES RESOLVED BY COMPOOL REFERENCE = 71  
 SIMPLE ITEMS 39  
 ARRAYS 5  
 TABLES 0  
 TABLE ITEMS 24  
 NUMBER OF EXTERNAL CLOSES REFERENCED = 0  
 NUMBER OF SYSTEM DEFINED PROCEDURES AND FUNCTIONS = 1  
 NUMBER OF MODE DEFINED SIMPLE ITEMS = 0  
 NUMBER OF SIMPLE ITEMS RESOLVED TO DEFAULT ATTRIBUTES = 0  
 PERCENTAGE OF DATA, PROCEDURE, SWITCH, AND CLOSE IDENTIFIERS LACKING EXPLICIT PROGRAM OR COMPOOL DECLARATION = 0.88

25

NUMBER OF ASSIGNMENT STATEMENTS = 241  
 PERCENTAGE OF ALL SIMPLE STATEMENTS = 87.64 %  
 NUMBER OF ARITHMETIC ASSIGNMENTS = 88  
 NUMBER OF CHARACTER ASSIGNMENTS = 20  
 NUMBER OF BOOLEAN ASSIGNMENTS = 41  
 NUMBER OF STATUS ASSIGNMENTS = 92  
 NUMBER OF ENTRY ASSIGNMENTS = 0  
 NUMBER OF EXCHANGE STATEMENTS = 0  
 PERCENTAGE OF ALL SIMPLE STATEMENTS = 0. %  
 NUMBER OF GOTO STATEMENTS = 8  
 PERCENTAGE OF ALL SIMPLE STATEMENTS = 2.91 %  
 NUMBER OF RETURN STATEMENTS = 3  
 PERCENTAGE OF ALL SIMPLE STATEMENTS = 1.09 %  
 NUMBER OF STOP STATEMENTS = 0  
 PERCENTAGE OF ALL SIMPLE STATEMENTS = 0. %  
 NUMBER OF TEST STATEMENTS = 0  
 PERCENTAGE OF ALL SIMPLE STATEMENTS = 0. %  
 NUMBER OF PROCEDURE CALLS = 21  
 PERCENTAGE OF ALL SIMPLE STATEMENTS = 7.64 %  
 NUMBER OF INPUT/OUTPUT STATEMENTS = 2  
 PERCENTAGE OF ALL SIMPLE STATEMENTS = 0.73 %  
 NUMBER OF FILE OPENING STATEMENTS WITHOUT DATA TRANSMISSION = 0  
 NUMBER OF FILE OPENING STATEMENTS WITH DATA TRANSMISSION = 0  
 NUMBER OF FILE CLOSING STATEMENTS WITHOUT DATA TRANSMISSION = 0  
 NUMBER OF FILE CLOSING STATEMENTS WITH DATA TRANSMISSION = 0  
 NUMBER OF INPUT STATEMENTS = 2  
 NUMBER OF OUTPUT STATEMENTS = 0

BEST AVAILABLE COPY

TOTAL NUMBER OF SIMPLE STATEMENTS IN PROGRAM = 275

NUMBER OF IF STATEMENTS = 46  
PERCENTAGE OF ALL COMPLEX STATEMENTS = 52.27 %  
NUMBER OF IFEITH STATEMENTS = 32  
PERCENTAGE OF ALL COMPLEX STATEMENTS = 36.36 %  
NUMBER OF FOR STATEMENTS = 10  
PERCENTAGE OF ALL COMPLEX STATEMENTS = 11.36 %  
NUMBER OF DIRECT STATEMENTS = 0  
PERCENTAGE OF ALL COMPLEX STATEMENTS = 0. %  
TOTAL NUMBER OF COMPLEX STATEMENTS IN PROGRAM = 88

TOTAL NUMBER OF SIMPLE AND COMPLEX EXECUTABLE STATEMENTS IN PROGRAM = 363  
TOTAL NUMBER OF EXECUTABLE AND NON-EXECUTABLE STATEMENTS IN PROGRAM = 405

NUMBER OF COMPOUND STATEMENTS = 87  
NUMBER OF STATEMENT LABELS = 7

TOTAL NUMBER OF ARITHMETIC EXPRESSIONS = 88  
TOTAL NUMBER OF TOKENS IN ARITHMETIC EXPRESSIONS = 199

NUMBER OF CONSTANTS = 66  
NUMBER OF VARIABLES = 75  
NUMBER OF SUBSCRIPTED VARIABLES = 3  
NUMBER OF PLUS SIGNS = 35  
NUMBER OF MINUS SIGNS = 9  
NUMBER OF MULTIPLICATION SIGNS = 4  
NUMBER OF DIVISION SIGNS = 4  
NUMBER OF EXPONENTIATION OPERATORS = 0  
NUMBER OF ABSOLUTE VALUE REFERENCES = 0  
NUMBER OF USES OF BIT MODIFIER = 0  
NUMBER OF USES OF BYTE MODIFIER = 0  
NUMBER OF USES OF CHAR MODIFIER = 0  
NUMBER OF LOC FUNCTION CALLS = 0  
NUMBER OF USES OF MANT MODIFIER = 0  
NUMBER OF USES OF NENT MODIFIER = 0  
NUMBER OF NWDSEN FUNCTION CALLS = 0  
NUMBER OF USES OF P/S MODIFIER = 0  
NUMBER OF OTHER FUNCTION CALLS = 0

# HASH CODING TABLE

0	1	2	3	4
5	6	7	8	9
10	11	12	13	14
15	16	17	18	19
20	21	22	23	24
25	26	27	28	29
30	31	32	33	34
35	36	37	38	39
40	41	42	43	44
45	46	47	48	49
50	51	52	53	54
55	56	57	58	59
60	61	62	63	64
65	66	67	68	69
70	71	72	73	74
75	76	77	78	79
80	81	82	83	84
85	86	87	88	89
90	91	92	93	94
95	96	97	98	99
100	101	102	103	104
105	106	107	108	109
110	111	112	113	114
115	116	117	118	119
120	121	122	123	124
125	126	127	128	129
130	131	132	133	134
135	136	137	138	139
140	141	142	143	144
145	146	147	148	149
150	151	152	153	154
155	156	157	158	159
160	161	162	163	164
165	166	167	168	169
170	171	172	173	174
175	176	177	178	179
180	181	182	183	184
185	186	187	188	189
190	191	192	193	194
195	196	197	198	199
200	201	202	203	204
205	206	207	208	209
210	211	212	213	214
215	216	217	218	219
220	221	222	223	224
225	226	227	228	229
230	231	232	233	234
235	236	237	238	239
240	241	242	243	244
245	246	247	248	249
250	251	252	253	254
255	256	257	258	259

CURTAB

STRCNT

I RREL

CMP IND

MODUSE

TABNO

TNTSON  
COLFLG

CURTK

TRGVAR

TNENT

TBSONO

CURCON

ACMLGH  
NLINES

NDFDIR

CRSPNO

260	RLTNFN	261	CURTOK	262		263	PATLOC	264	CRTK
265		266		267		268		269	
270		271		272		273		274	
275		276		277		278		279	
280		281		282		283		284	
285		286		287		288		289	
290		291		292		293		294	
295		296		297		298		299	
300		301		302		303		304	
305		306		307		308		309	
310		311		312		313		314	
315		316		317		318		319	
320		321		322		323		324	
325		326		327		328		329	
330		331		332		333		334	
335		336		337		338		339	
340		341		342		343		344	
345		346		347		348		349	
350		351		352		353		354	
355		356		357		358		359	
360		361		362		363		364	
365		366		367		368		369	
370		371		372	DEFTAE	373		374	
375		376		377		378		379	
380		381		382		383		384	
385		386		387		388		389	
390		391		392	PUTOUT	393		394	
395		396	DECODE	397	UNENTS	398		399	
400		401	NSCHRS	402		403		404	
405		406		407		408	TBLSZ	409	
410		411		412		413		414	
415		416		417		418	FIXINT	419	
420		421		422		423		424	
425		426		427	SCPNAM	428	TABNAM	429	
430		431		432	TT	433		434	
435		436		437		438		439	
440		441		442		443		444	
445		446		447		448	BFOUT	449	
450		451		452		453		454	
455		456		457		458		459	
460	NEXTOK	461		462		463		464	
465		466		467		468		469	
470		471		472		473		474	
475		476		477		478		479	
480		481		482		483		484	
485	NTOKNS	486		487		488		489	
490	ARDMNO	491		492		493	ALNLGH	494	
495	LITLOC	496	BFSET	497		498		499	
500		501		502		503		504	
505		506		507		508		509	
510		511		512		513		514	
515		516		517		518		519	
520		521		522		523		524	
525		526		527		528		529	SBXTNT







1340					1343					1344
1345					1348					1349
1350					1351					1354
1355					1356					1359
1360					1361					1364
1365					1366					1369
1370					1371					1374
1375					1376					1379
1380					1381					1384
1385	LIK TAB				1386					1389
1390	TISTCS				1391					1394
1395	CMSQNO				1396					1399
1400					1401					1404
1405	TYPTMP				1406					1409
1410					1411					1414
1415					1416					1419
1420					1421					1424
1425					1426					1429
1430					1431					1434
1435					1436					1439
1440					1441					1444
1445					1446					1449
1450					1451					1454
1455					1456					1459
1460					1461					1464
1465					1466					1469
1470					1471					1474
1475					1476					1479
1480					1481					1484
1485					1486					1489
1490					1491					1494
1495					1496					1499
1500					1501					1504
1505					1506					1509
1510					1511					1514
1515					1516					1519
1520	DECTYP				1521					1524
1525					1526					1529
1530					1531					1534
1535					1536					1539
1540					1541					1544
1545					1546					1549
1550					1551					1554
1555					1556					1559
1560					1561					1564
1565					1566					1569
1570					1571					1574
1575					1576					1579
1580					1581					1584
1585					1586					1589
1590					1591					1594
1595					1596					1599
1600					1601					1604
1605					1606					1609

1342					1343					1344
1347					1348					1349
1352					1351					1354
1357					1356					1359
1362					1361					1364
1367					1366					1369
1372					1371					1374
1377					1376					1379
1382					1381					1384
1387					1386					1389
1392					1391					1394
1397					1396					1399
1402					1401					1404
1407					1406					1409
1412					1411					1414
1417					1416					1419
1422					1421					1424
1427					1426					1429
1432					1431					1434
1437					1436					1439
1442					1441					1444
1447					1446					1449
1452					1451					1454
1457					1456					1459
1462					1461					1464
1467					1466					1469
1472					1471					1474
1477					1476					1479
1482					1481					1484
1487					1486					1489
1492					1491					1494
1497					1496					1499
1502					1501					1504
1507					1506					1509
1512					1511					1514
1517					1516					1519
1522					1521					1524
1527					1526					1529
1532					1531					1534
1537					1536					1539
1542					1541					1544
1547					1546					1549
1552					1551					1554
1557					1556					1559
1562					1561					1564
1567					1566					1569
1572					1571					1574
1577					1576					1579
1582					1581					1584
1587					1586					1589
1592					1591					1594
1597					1596					1599
1602					1601					1604
1607					1606					1609

1342					1343					1344
1347					1348					1349
1352					1351					1354
1357					1356					1359
1362					1361					1364
1367					1366					1369
1372					1371					1374
1377					1376					1379
1382					1381					1384
1387					1386					1389
1392					1391					1394
1397					1396					1399
1402					1401					1404
1407					1406					1409
1412					1411					1414
1417					1416					1419
1422					1421					1424
1427					1426					1429
1432					1431					1434
1437					1436					1439
1442					1441					1444
1447					1446					1449
1452					1451					1454
1457					1456					1459
1462					1461					1464
1467					1466					1469
1472					1471					1474
1477					1476					1479
1482					1481					1484
1487					1486					1489
1492					1491					1494
1497					1496					1499
1502					1501					1504
1507					1506					1509
1512					1511					1514
1517					1516					1519
1522					1521					1524
1527					1526					1529
1532					1531					1534
1537					1536					1539
1542					1541					1544
1547					1546					1549
1552					1551					1554
1557					1556					1559
1562					1561					1564
1567					1566					1569
1572					1571					1574
1577					1576					1579
1582					1581					1584
1587					1586					1589
1592					1591					1594
1597					1596					

1610	1611	1612	1613	1614
1615	1616	1617	1618	1619
1620	1621	1622	1623	1624
1625	1626	1627	1628	1629
1630	1631	1632	1633	1634
1635	1636	1637	1638	1639
1640	1641	1642	1643	1644
1645	1646	1647	1648	1649
1650	1651	1652	1653	1654
1655	1656	1657	1658	1659
1660	1661	1662	1663	1664
1665	1666	1667	1668	1669
1670	1671	1672	1673	1674
1675	1676	1677	1678	1679
1680	1681	1682	1683	1684
1685	1686	1687	1688	1689
1690	1691	1692	1693	1694
1695	1696	1697	1698	1699
1700	1701	1702	1703	1704
1705	1706	1707	1708	1709
1710	1711	1712	1713	1714
1715	1716	1717	1718	1719
1720	1721	1722	1723	1724
1725	1726	1727	1728	1729
1730	1731	1732	1733	1734
1735	1736	1737	1738	1739
1740	1741	1742	1743	1744
1745	1746	1747	1748	1749
1750	1751	1752	1753	1754
1755	1756	1757	1758	1759
1760	1761	1762	1763	1764
1765	1766	1767	1768	1769
1770	1771	1772	1773	1774
1775	1776	1777	1778	1779
1780	1781	1782	1783	1784
1785	1786	1787	1788	1789
1790	1791	1792	1793	1794
1795	1796	1797	1798	1799
1800	1801	1802	1803	1804
1805	1806	1807	1808	1809
1810	1811	1812	1813	1814
1815	1816	1817	1818	1819
1820	1821	1822	1823	1824
1825	1826	1827	1828	1829
1830	1831	1832	1833	1834
1835	1836	1837	1838	1839
1840	1841	1842	1843	1844
1845	1846	1847	1848	1849
1850	1851	1852	1853	1854
1855	1856	1857	1858	1859
1860	1861	1862	1863	1864
1865	1866	1867	1868	1869
1870	1871	1872	1873	1874
1875	1876	1877	1878	1879

1880  
1885  
1890  
1895  
1900  
1905  
1910  
1915  
1920  
1925  
1930  
1935  
1940  
1945  
1950  
1955  
1960  
1965  
1970  
1975  
1980  
1985  
1990  
1995

TABBF  
PITNAM

1881  
1886  
1891  
1896  
1901  
1906  
1911  
1916  
1921  
1926  
1931  
1936  
1941  
1946  
1951  
1956  
1961  
1966  
1971  
1976  
1981  
1986  
1991  
1996

CBESB

1882  
1887  
1892  
1897  
1902  
1907  
1912  
1917  
1922  
1927  
1932  
1937  
1942  
1947  
1952  
1957  
1962  
1967  
1972  
1977  
1982  
1987  
1992  
1997

SICTMP

1883  
1888  
1893  
1898  
1903  
1908  
1913  
1918  
1923  
1928  
1933  
1938  
1943  
1948  
1953  
1958  
1963  
1968  
1973  
1978  
1983  
1988  
1993  
1998

KK

1884  
1889  
1894  
1899  
1904  
1909  
1914  
1919  
1924  
1929  
1934  
1939  
1944  
1949  
1954  
1959  
1964  
1969  
1974  
1979  
1984  
1989  
1994

ITDETR

SYZ

SYMBOL TABLE

NAME	SCOPE	TYPE	CLASS	TABLE	NENT	NWDSN	STRUC	PACK
STATIS	SCOPE	TYPE	CLASS	TABLE	NENT	NWDSN	STRUC	PACK
STKEY	COMP001		DEFINE					
DELIM	COMP001		DEFINE					
DCST1	COMP001		DEFINE					
DCST2	COMP001		DEFINE					
IGSTAT	COMP001		DEFINE					
OPSTAT	COMP001		DEFINE					
BLNFN	COMP001		DEFINE					
ONSTAT	COMP001		DEFINE					
ITICS	COMP001		COMMON					
REDER	COMP001		FILE					
PRNT	COMP001		FILE					
BFIRST	COMP001		ITEM					
BFOUT	COMP001		ITEM					
JABBF	COMP001		ITEM					
BFSET	COMP001		ITEM					
SPOT	COMP001		ITEM					
KK	COMP001		ITEM					
CURTK	COMP001		ITEM					
CURCON	COMP001		ITEM					
COLFLG	COMP001		ITEM					
PRCSIN	COMP001		ITEM					
CONPRC	COMP001		ITEM					
DECTYP	COMP001		ITEM					
MODUSE	COMP001		ITEM					
TOK	COMP001		TABLE					
TOKIN	COMP001		TABLE					
TOKPOS	COMP001		TABLE					
HSHTAB	COMP001		TABLE					
TBENT	COMP001		TABLE					
INDX	COMP001		TABLE					
INDIC	COMP001		TABLE					
INSDIC	COMP001		TABLE					
IRREL	COMP001		TABLE					
SYMTAB	COMP001		TABLE					
KNAME	COMP001		TABLE					
SCOP	COMP001		TABLE					
SCOPNO	COMP001		TABLE					
CMSPN0	COMP001		TABLE					
TABNO	COMP001		TABLE					
CLAS	COMP001		TABLE					
TIPE	COMP001		TABLE					
TNENT	COMP001		TABLE					
TNWDN	COMP001		TABLE					
TORSPC	COMP001		TABLE					
TRGVAR	COMP001		TABLE					
ISTRUC	COMP001		TABLE					
TPACK	COMP001		TABLE					
EVANT	COMP001		TABLE					
DECWAY	COMP001		TABLE					

BEST AVAILABLE COPY

ARNO	COMPPOOL	TABLE	ITEM	IS	SYMTAB	R	100	P	N
ARMNO	COMPPOOL	TABLE	ITEM	IS	SYMTAB				
CMSQNO	COMPPOOL	ITEM	ITEM	IS	SYMTAB				
SCPNAM	COMPPOOL	ARRAY	ARRAY	H	DIMS:	200			
CRSPNO	COMPPOOL	ITEM	ITEM	IS	DIMS:	200			
TABNAM	COMPPOOL	ITEM	ITEM	H	DIMS:	100			
TRSQNO	COMPPOOL	ARRAY	ARRAY	IS	DIMS:	100			
UNENTS	COMPPOOL	ITEM	ITEM	IS	DIMS:	100			
UTISON	COMPPOOL	ARRAY	ARRAY	IS	DIMS:	100			
UNWDS	COMPPOOL	ITEM	ITEM	IS	DIMS:	100			
INWSON	COMPPOOL	ARRAY	ARRAY	IS	DIMS:	100			
ARDIMS	COMPPOOL	ITEM	ITEM	IS	DIMS:	100			
ARSONO	COMPPOOL	ARRAY	ARRAY	IS	DIMS:	100			
ICLNAM	COMPPOOL	ITEM	ITEM	IS	DIMS:	100			
TIP	COMPPOOL	ITEM	ITEM	H					
SYZ	COMPPOOL	ITEM	ITEM	S					
IBLSZ	COMPPOOL	ITEM	ITEM	IS					
HSHCNT	COMPPOOL	ITEM	ITEM	IS					
GNU	COMPPOOL	ITEM	ITEM	IS					
SBXINT	COMPPOOL	ITEM	ITEM	B					
CMTBDP	COMPPOOL	ITEM	ITEM	B					
CMPROP	COMPPOOL	ITEM	ITEM	R					
ALDEFS	COMPPOOL	ITEM	ITEM	R					
DFSPT	COMPPOOL	ITEM	ITEM	H					
DFSPTO	COMPPOOL	ITEM	ITEM	IS					
DEFNST	COMPPOOL	ITEM	ITEM	IS					
STRNG	COMPPOOL	ITEM	ITEM	IS					
SIRCNT	COMPPOOL	ITEM	ITEM	IS					
DEFNST	COMPPOOL	TABLE	ITEM	IS	DEFNST				
DEFNAM	COMPPOOL	TABLE	ITEM	H	DEFNST				
STRG	COMPPOOL	TABLE	ITEM	IS	DEFNST				
STCNT	COMPPOOL	TABLE	ITEM	IS	DEFNST				
DEFTAB	COMPPOOL	TABLE	ITEM	H	DEFTAB				
BFTMP	COMPPOOL	TABLE	ITEM	IS	DEFTAB				
SPIMP	COMPPOOL	TABLE	ITEM	IS	DEFTAB				
STIMP	COMPPOOL	TABLE	ITEM	IS	DEFTAB				
STCTMP	COMPPOOL	TABLE	ITEM	IS	DEFTAB				
NLINES	COMPPOOL	ITEM	ITEM	IS					
NTOKNS	COMPPOOL	ITEM	ITEM	IS					
NEXTOK	COMPPOOL	ITEM	ITEM	IS					
NSCHRS	COMPPOOL	ITEM	ITEM	IS					
ALNLGH	COMPPOOL	ITEM	ITEM	FL					
NCOMNT	COMPPOOL	ITEM	ITEM	IS					
NCOMCR	COMPPOOL	ITEM	ITEM	IS					
ACMLGH	COMPPOOL	ITEM	ITEM	IS					
NDFDIR	COMPPOOL	ITEM	ITEM	FL					
NDFCHR	COMPPOOL	ITEM	ITEM	IS					
ADFCHR	COMPPOOL	ITEM	ITEM	IS					
NDFCAL	COMPPOOL	ITEM	ITEM	FL					
ADFAL	COMPPOOL	ITEM	ITEM	IS					
PASSI	COMPPOOL	ITEM	ITEM	FL					
INDEX PRC	COMPPOOL	PROCEDURE	PROCEDURE	IS					
PASSI	COMPPOOL	PROCEDURE	PROCEDURE	IS					
GETTOK	COMPPOOL	ITEM	ITEM	S					
FEE	COMPPOOL	ITEM	ITEM	S					
FOKE	COMPPOOL	ITEM	ITEM	S					



H  
R  
IS  
IS  
IS


ITEM  
ITEM  
ITEM  
ITEM  
ITEM  
LABEL  
LABEL

LIKTAB  
LIKTAB  
LIKTAB  
LIKTAB  
LIKTAB  
LIKTAB  
LIKTAB


PROCEDURE  
PROCEDURE  
PROCEDURE  
PROCEDURE  
PROCEDURE  
PROCEDURE  
PROCEDURE

LIKCHR  
GNUE  
PATLOC  
LITLOC  
HSCIST  
KNOPAT  
KNOLNM

Table 11: Sample Statistics Output

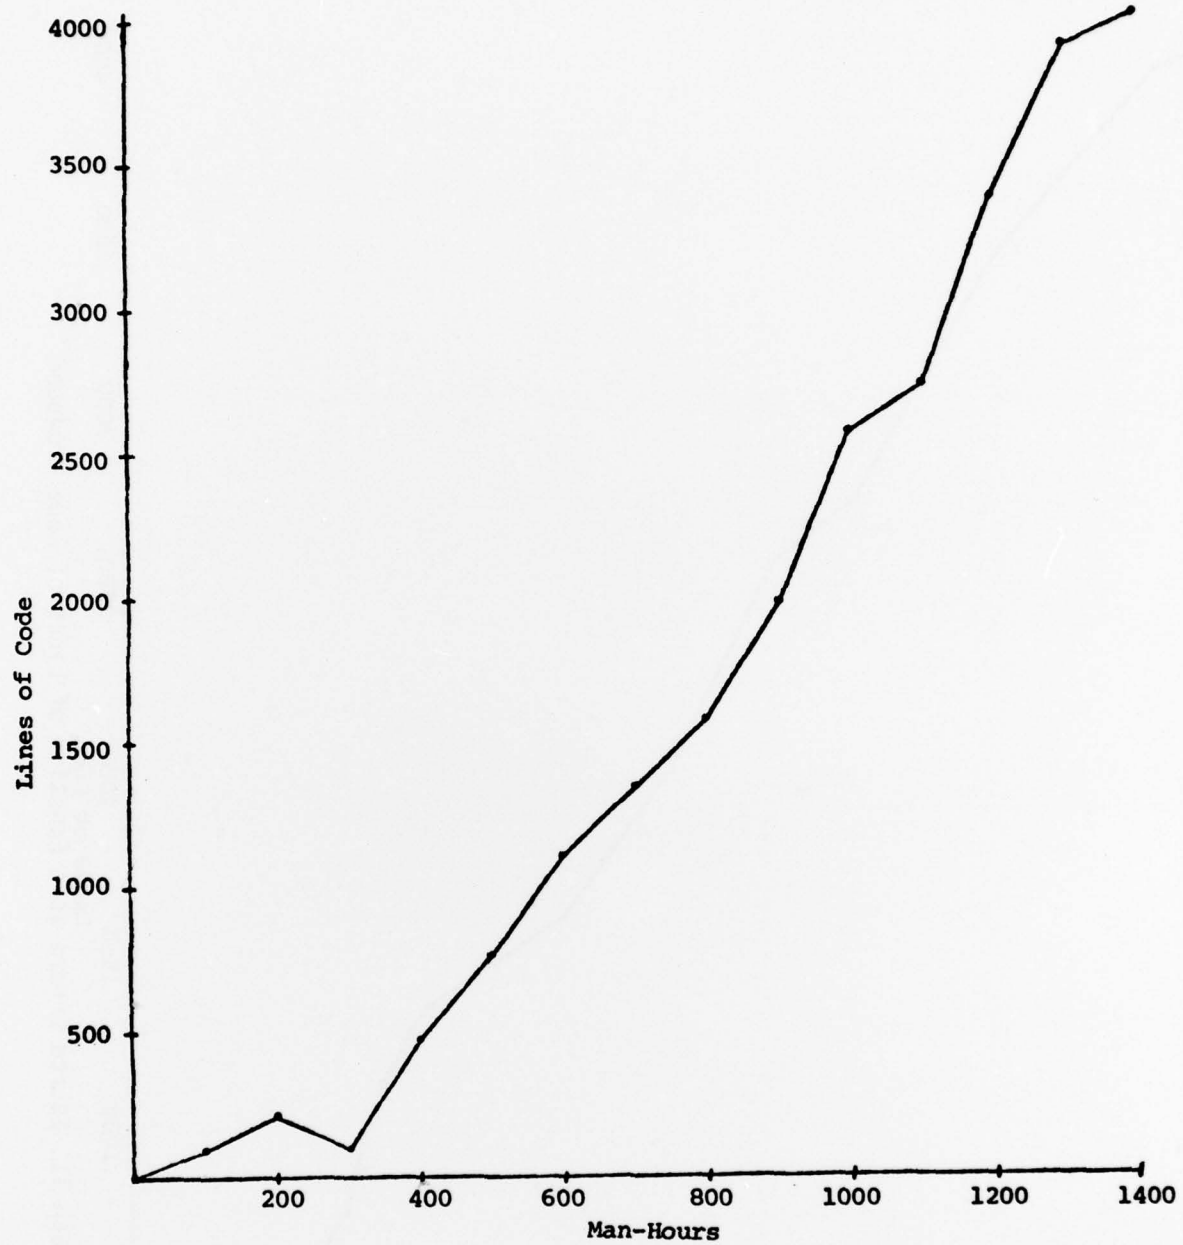

Graph I. Lines of Code Produced as a Function of Man-hours of Work

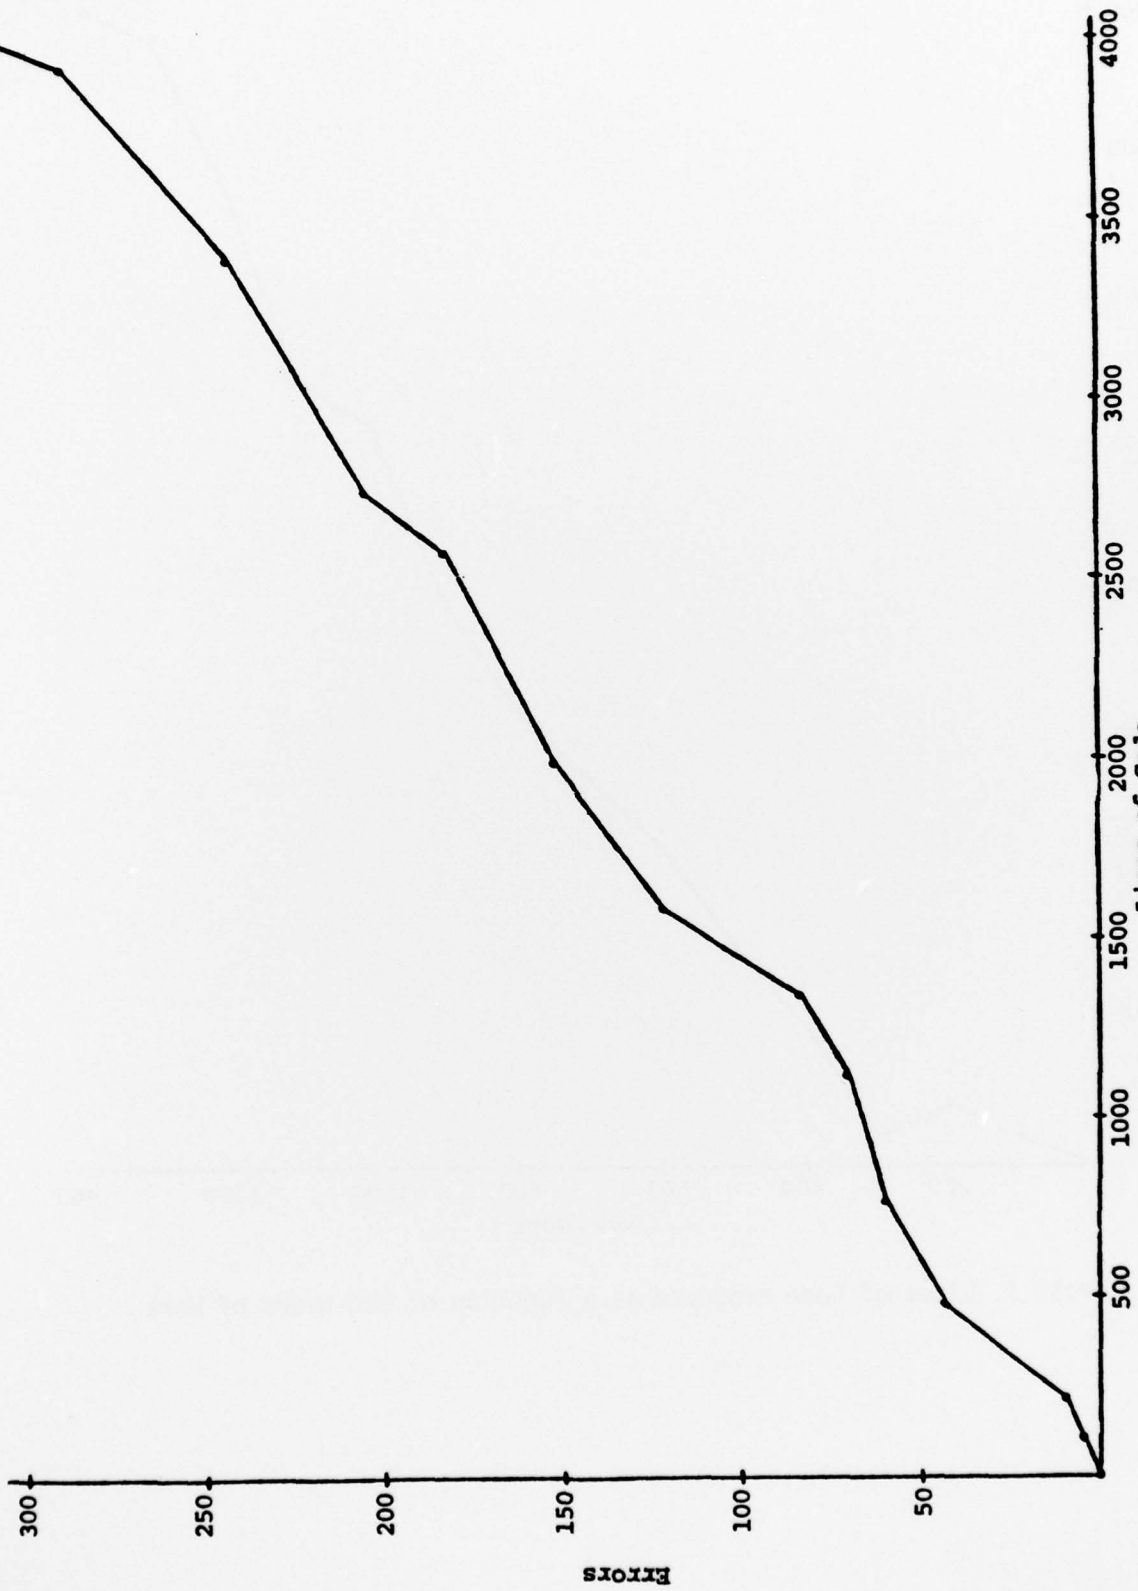

Graph II. Source Errors as a Function of Lines of Code Produced